


AD-R Series Technical Details

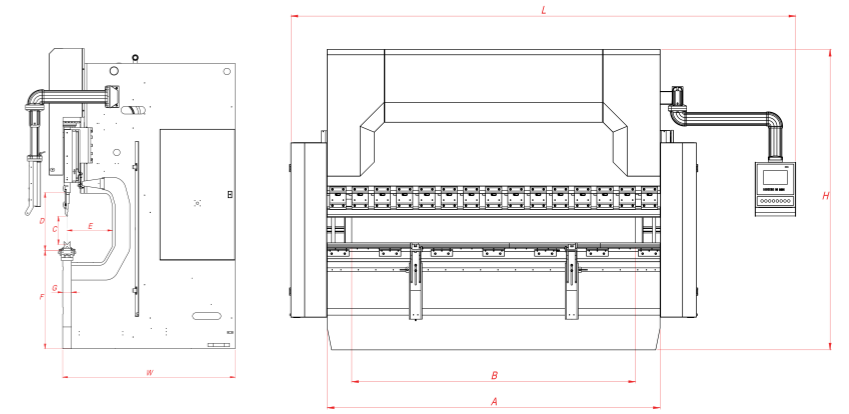

AD-R Series	Bending Force	Bending Length	Distance Between Columns	Stroke	Daylight	Throat Depth	Table Height	Table Width	Working Speed	
									Y Rapid Speed	Y Working Speed
	Ton	mm	mm	mm	mm	mm	mm	mm	mm/sn.	mm/sn.
		A	B	C	D	E	F	G		
AD-R 1260	60	1250	1050	160	400	350	900	104	200	10
AD-R 2060	60	2050	1700	160	400	350	900	104	200	10
AD-R 25100	100	2550	2200	265	530	450	900	104	180	10
AD-R 30100	100	3050	2600	265	530	450	900	104	180	10
AD-R 30135	135	3050	2600	265	530	450	900	104	160	10
AD-R 30175	175	3050	2600	265	530	450	900	104	160	10
AD-R 30220	220	3050	2600	265	530	450	900	104	140	10
AD-R 30320	320	3050	2600	365	630	450	900	154	160	10
AD-R 37175	175	3700	3100	265	530	450	900	104	140	10
AD-R 37220	220	3700	3100	265	530	450	900	104	160	10
AD-R 40175	175	4050	3600	265	530	450	900	104	160	10
AD-R 40220	220	4050	3600	265	530	450	900	104	160	10
AD-R 40320	320	4050	3600	365	630	450	900	154	160	10
AD-R 40400	400	4050	3400	365	630	510	1050	154	140	8
AD-R 60220	220	6050	5100	265	530	450	1100	154	140	10
AD-R 60320	320	6050	5100	365	630	450	1100	154	140	10
AD-R 60400	400	6050	5100	365	630	510	1220	154	120	8

Machines set according to optimum values.

Y Return Speed	X Axes Working Speed	R Axes Working Distance	R Axes Working Distance (Options for R Axis Motor)	X Axes Distance			Motor Power	Length	Width	Height	Weight Approx.
				650	750	1000					
mm/sn.	mm/sn.	mm	mm				kW	mm	mm	mm	kg
								L	W	H	
110	500	140	250	S	-	O	7,5	2500	1900	2800	4400
110	500	140	250	S	-	O	7,5	3200	1770	2880	5420
120	500	140	250	S	-	O	11	3800	1700	2880	7400
120	500	140	250	S	-	O	11	4200	1800	2890	8000
120	500	140	250	S	-	O	15	4200	1800	2890	9170
100	500	140	250	S	-	O	18,5	4250	1800	2890	10520
140	500	140	250	S	-	O	22	4800	1850	2950	12250
140	500	140	250	S	-	O	37	4100	1900	3230	17260
100	500	140	250	S	-	O	18,5	4800	1800	2900	11860
120	500	140	250	S	-	O	22	4800	1850	2950	14100
140	500	140	250	S	-	O	18,5	5100	1800	2900	12750
140	500	140	250	S	-	O	22	5100	1850	2950	15000
140	500	140	250	S	-	O	37	5300	1910	2950	20040
120	350	140	250	-	S	O	37	5750	2110	3640	25000
120	350	140	250	-	S	O	22	7500	1770	3350	21760
120	350	140	250	-	S	O	37	7500	1910	3550	28000
100	350	140	250	-	S	O	37	7500	2110	3810	34200

S : Standard

O : Option